


Patch Cord-SC Connector

SC APC - SC UPC



Application LAN Optic-fiber Sensors, Component Termination, Optic-fiber Access Networks, Optic-fiber Data Communications, Optic-fiber Data Communications

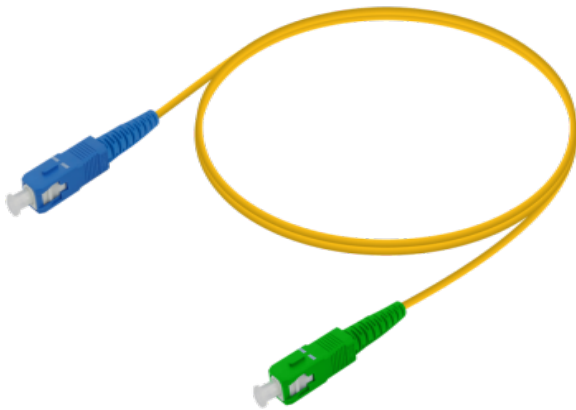

Contact us: info@linkplus.com.es

Item	Parameter			
OD of cable	$\Phi 0.9, \Phi 2.0, \Phi 3.0, \Phi 3.6, 2 \times 3 \text{mm}$			
Cable Type	PVC,LSZH,OFNP			
Fiber Type	G652D,G657a1,G657a2			
Connector Type	SC/APC,SC/UPC			
Ceramic Ferrule	APC(SM)	UPC(SM)	APC(MM)	UPC(MM)
Insertion Loss(dB)	Max $\leq 0.3 \text{dB}$,Typically $\leq 0.2 \text{dB}$			
Repeatability(dB)	≤ 0.10			
Changeability(dB)	≤ 0.20			≤ 0.30
Return Loss(dB)	≥ 60	≥ 50	≥ 60	≥ 50